

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

862.3095

First Named Inventor or Application Identifier

NAOYUKI NISHIKAWA

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages

3. ☒ Drawing(s) (35 USC 113) Total Sheets

4. ☒ Oath or Declaration Total Pages

a. ☐ Newly executed (original or copy)

b. ☒ Unexecuted for information purposes

c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]

i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting
inventor(s) named in the prior application, see
37 CFR 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 4c, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS
Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
Status still proper and desired

15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation

☐ Divisional

☐ Continuation-in-part (CIP) of prior application No. _____

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	37-20 =	17	X \$ 18.00 =	\$ 306.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	6-3 =	3	X \$ 78.00 =	\$ 234.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$ 0.00
				BASIC FEE (37 CFR 1.16(a))	\$ 760.00
				Total of above Calculations = \$1,300.00	
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$1,300.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
c. ☐ Is no longer claimed.


20. ☒ A check in the amount of \$1,300.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$_____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge any deficiencies in the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
b. ☒ Fees required under 37 CFR 1.17.
c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	LEONARD P. DIANA, Reg. No. 29,296
SIGNATURE	
DATE	October 27, 1999

TITLE OF THE INVENTION
IMAGE PROCESSING APPARATUS AND METHOD, AND
RECORDING MEDIUM

5 BACKGROUND OF THE INVENTION

This invention relates to an image processing
apparatus and method and a recording medium and, more
particularly, to an image processing apparatus and method
10 which correct image data, and a recording medium.

Conventionally, an image read with a color device
(digital camera or scanner) without using any color
management system (CMS) tends to be an image poor in quality
because the contrast is weak or saturation is low because
15 of, e.g., inappropriate gamma adjustment. When such a
poor-quality image is directly printed, only a printout
with a considerably degraded image quality is obtained.

To solve this problem, before an input poor-quality
image is printed, image data already stored in a storage
20 device or the like is accessed and analyzed to obtain the
feature of the image. When the image data is appropriately
corrected in accordance with the feature of the image, the
quality of the output image can be improved.

In the conventional correction method, however,
25 correction parameters must be determined on the basis of
the feature of the image obtained by image analysis, and

the image must be corrected on the basis of the correction parameters. Hence, the speed of processing required for image output is largely reduced. Especially, when the resolution of image data becomes high to increase the data amount, the processing speed is extremely reduced.

To prevent the processing speed from decreasing due to an increase in data amount, data may be thinned. Although the processing speed can be increased with this method, the processing resolution becomes low, and appropriate correction processing cannot be performed, resulting in degradation in quality of the output image.

SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide an image processing apparatus and method which allow high-speed image correction processing by determining a correction parameter on the basis of image information added to an image to be corrected, and a recording medium.

According to the present invention, the foregoing object is attained by providing an image processing apparatus comprising: input means for inputting reduced image information of image data; analysis means for analyzing the reduced image information; setting means for setting a correction parameter of the image data on the basis of an analysis result; and correction means for

correcting the image data on the basis of the correction parameter.

With this arrangement, the reduced image information of image data can be analyzed by the analysis means, a
5 correction parameter based on the analysis result can be set by the setting means, and the image data can be corrected by the correction means on the basis of the correction parameter.

And it is another object of the present invention to
10 provide an image processing apparatus and method which allow the user to arbitrarily set various conditions associated with image correction and provide a more suitable print environment, and a recording medium.

According to the present invention, the foregoing
15 object is attained by providing an image processing apparatus further comprising instruction means for instructing one of automatic setting and manual setup for image data correction processing.

With this arrangement, the user can arbitrarily set
20 various conditions associated with image correction when said instruction means instructs manual setup.

And it is another object of the present invention to provide an image processing apparatus and method which determine a correction parameter for image data held in a
25 device and adds the parameter to the image data file in advance to allow high-speed image correction processing at

the time of output, and a recording medium.

According to the present invention, the foregoing object is attained by providing an image processing apparatus comprising: holding means for holding image data
5 in a predetermined file format; analysis means for analyzing the image data; calculation means for calculating a correction parameter of the image data on the basis of an analysis result; and addition means for adding the correction parameter to a file of the image data.

10 With this arrangement, image data held by the holding means can be analyzed by the analysis means, a correction parameter based on the analysis result can be calculated by the calculation means, and the correction parameter can be added to the image data file by the addition means.

15 The invention is particularly advantageous since appropriate correction processing can be performed at a high speed by determining, at a high speed, the correction parameter on the basis of the reduced image information of an image to be corrected.

20 Since the user can arbitrarily set various conditions associated with image correction, a more suitable print environment can be provided.

When the correction parameter is determined for image data held in a device and added to the image data file in
25 advance, the image can be corrected at a high speed at the time of output.

Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts
5 throughout the figures thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate
10 embodiments of the invention and, together with the description, serve to explain the principles of the invention.

Fig. 1 is a block diagram showing the schematic arrangement of an image processing apparatus according to
15 the first embodiment of the present invention;

Fig. 2 is a block diagram showing the functional arrangement of an image processing section of the first embodiment;

Fig. 3 is a view showing the image data file storage
20 formats in the first embodiment;

Figs. 4A and 4B are views showing the image data file formats in the first embodiment;

Fig. 5 is a flow chart showing gamma correction value calculation processing in the first embodiment;

25 Fig. 6 is a block diagram showing the functional arrangement of an image processing section according to the

second embodiment of the present invention;

Fig. 7 is a view showing the image data file storage formats in the second embodiment;

Fig. 8 is a flow chart showing correction value
5 calculation processing in the second embodiment;

Figs. 9A to 9C are views showing examples of setup windows in the third embodiment of the present invention;

Figs. 10A to 10C are views showing a method of setting image correction parameters for an image file in the third
10 embodiment;

Fig. 11 is a block diagram showing the functional arrangement of an image processing section according to the fourth embodiment of the present invention;

Fig. 12 is a flow chart showing gamma value tag
15 addition processing in the fourth embodiment;

Fig. 13 is a view showing an example of a setup window in the fourth embodiment;

Figs. 14A to 14E are views showing examples of setup windows in the fourth embodiment of the present invention;

20 Figs. 15A and 15B are views showing details of image data file formats in the fourth embodiment;

Fig. 16 is a view showing the image data file storage formats in the fourth embodiment;

Figs. 17A and 17B are views showing examples of setup
25 windows for setting details of image correction parameters in the fifth embodiment of the present invention; and

Figs. 18A to 18C are views showing examples of setup windows for setting details of image correction parameters in the sixth embodiment of the present invention.

5 DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention will now be described in detail in accordance with the accompanying drawings.

<First Embodiment>

10 Fig. 1 is a block diagram showing the arrangement of an image processing apparatus according to the first embodiment. Referring to Fig. 1, an image input section 10 is a color device (digital camera or scanner) without using any color management system (CMS). An image
15 processing section 11 performs various image processing operations including image correction processing as the characteristic feature of this embodiment. An operation section 12 such as an operation panel allows a user to input a command or notifies the user of the state of the image
20 processing apparatus. An image display section 13 such as a CRT displays image data. A communication section 14 transmits or receives image data. For example, the communication section 14 is connected to an external host computer to perform the same image input processing as in
25 the image input section 10 or the same image output processing as in an image output section 15. The image

output section 15 prints and outputs image data on a printing medium. In this embodiment, the image output section 15 is, e.g., a printer.

Fig. 2 is a block diagram showing the functional arrangement of the image processing section 11. Referring to Fig. 2, a CPU 30 executes a control program held in a ROM 31 or a program loaded into a RAM 32, thereby systematically controlling operations in the remaining components (to be described later) in the image processing section 11. The RAM 32 is used as the work area of the CPU 30.

Image data input from the image input section 10 is stored in a memory section 21 first.

The image data storage format in the memory section 21 will be described with reference to Fig. 3.

The image data from the image input section 10 is input to the memory section 21 as a file 41 shown in Fig. 3. As the characteristic feature of this embodiment, the input image data contains reduced image data. Reduced image data means image data obtained by reducing the resolution of original image data to decrease the number of pixels. A so-called thumbnail image and a preview image that displays the outline of original image data before it is displayed on the image display section 13 are also included in the reduced image data. The reduced image data may be a partial image obtained by extracting the feature portion of the

original image as far as the number of pixels is decreased.

Fig. 4B shows the detailed file format of the file 41. Referring to Fig. 4B, "magic number", "version information", and "directory offset" correspond to the header information of the file 41 shown in Fig. 3, and "tag 1" to "tag N" correspond to the standard tag set. "Reduced image data" and "image data" follow them.

The "reduced image data" shown in Fig. 4B may be either the above-described reduced image data itself or the address information (pointer) of the memory space where the reduced image data is stored.

Referring to Fig. 3, reference numeral 40 denotes a general idea of various programs executed by the CPU 30. The image data file 41 input from the image input section 10 is converted into a file 42 having an application internal format by the application program (to be referred to as an application hereinafter) executed by the CPU 30. Generally, an application for processing image data executes processing by appropriately referring to necessary data in an image data file and converting the data into the application internal format.

To print the image by a printer, the API or the like of the operating system (to be referred to as an OS hereinafter) is used to change the image data file 42 having the application internal format in accordance with the OS internal format. After this, the image is transferred to

a printer drive for controlling the printer. That is, the image data file 42 having the application internal format is converted into a file 43 with an OS internal format and then converted into a file 44 having a printer driver internal format.

In this embodiment, the reduced image data of the input image file 41 must be supplied to the printer driver. The reduced image data must be supplied to the printer driver even when the image file 41 does not contain the reduced image data, i.e., the reduced image data is present as an independent file. To cope with this, the application may ensure an area for reduced image data in addition to the members of the data structure of the file 41 and transfer the reduced image data to the area.

When the input image file 41 is to be converted into the file 42 having the application internal format, reduced image data as an independent file is read in a recording area ensured by the application. In starting printing the image data, the pointer of the storage area of the reduced image is contained in the information to be transferred to the OS.

In this embodiment, even when the input file 41 has a format shown in Fig. 4A, the file 41 is converted into the file 42 having a format including the reduced image data by the application, as shown in Fig. 4B. The printer driver side can access the reduced image data on the basis of the

transferred pointer. The application itself may have a function of generating reduced image data.

Referring back to Fig. 2, processing by the printer driver will be mainly described below. As described above,
5 the printer driver analyzes reduced image data added to an image file to determine the gamma correction value for printing and performs gamma conversion using the correction value. Hence, unlike a case wherein the entire image data is analyzed to calculate the gamma correction value, an
10 appropriate gamma correction value can be obtained in a short time.

A gamma table generation section 22 calculates the correction value for gamma conversion on the basis of the reduced image data to generate a gamma correction table 23.
15 A method of calculating the gamma correction value by the gamma table generation section 22 will be described below with reference to the flow chart in Fig. 5. In this example, the gamma correction value is uniquely obtained using a function containing a natural logarithm and the like on the
20 basis of the average lightness value of the entire screen.

In step S51, the reduced image data of image data to be gamma-corrected is input.

In step S52, the reduced image data is analyzed. More specifically, lightness data L is obtained in accordance
25 with equation (1):

$$L = 0.29 \times R + 0.59 \times G + 0.12 \times B \quad \dots (1)$$

An average value L_{avg} of all pixels of the lightness data L is obtained to calculate normalized data L_v . When the image has 24-bit RGB data, the average value L_{avg} can take one of values of 1 to 255.

$$5 \quad L_v = L_{avg}/255 \quad \dots (2)$$

An ideal L_v has a value of about 0.5.

When the value L_v is close to 0, the image becomes dark. Conversely, when the value L_v is close to 1, the image tends to be bright. For example, when the value L_v is 0, the RGB data values of all pixels are 0, i.e., the image is black. This image ($L_v = 0$) is not appropriate for arithmetic processing to be described later and therefore is excluded from the correction targets in this embodiment.

In step S53, the following calculation is done on the
15 basis of the obtained value L_v to obtain a correction gamma
value G_v .

$$G_v = \ln(0.5) / \ln(L_v) \quad \dots (3)$$

($\ln()$ is the natural logarithmic function, and $L_v \neq 0$)

20 To limit the correction value, the upper and lower
limit values of the gamma correction value may be defined.

In step S54, the gamma correction table 23 is generated on the basis of the correction gamma value Gv such that $y = x^{Gv}$ can be calculated for each of the RGB values. Alternatively, the closest correction value is appropriately selected from a plurality of gamma values

(e.g., $\gamma = 1.4, 1.8, 2.2, \dots$) that are prepared in advance.

A gamma conversion section 24 shown in Fig. 2 gamma-corrects the RGB values of the input image data using the gamma correction table 23 generated on the basis of the reduced image data as described above. The image data is transferred to a color space compression section 25 on the output side.

The color space compression section 25 compresses the color space of the input RGB data which are gamma-corrected, on the basis of an ICC color profile. A color space conversion section 26 converts the RGB data into YMCK data. The data is binarized by a binarization section 27 and then output to the image output section 15 corresponding to the printer engine.

As described above, according to the first embodiment, the gamma correction value is appropriately determined on the basis of the reduced image information of the input image, thereby appropriately correcting the image in a short time.

<Second Embodiment>

The second embodiment of the present invention will be described below. An image processing apparatus according to the second embodiment has the same arrangement as that shown in Fig. 1 described in the first embodiment, and a detailed description thereof will be omitted.

As the characteristic feature of the second

embodiment, reduced image information added to an image
file is read by the printer driver via an application and
OS, reduced image data is generated on the basis of the
reduced image information and analyzed on the printer
5 driver side, thereby setting image correction parameters.

Fig. 6 is a block diagram showing the functional
arrangement in an image processing section 11 according to
the second embodiment. The same reference numerals as in
Fig. 2 described in the first embodiment denote the same
10 parts in Fig. 6, and a detailed description thereof will
be omitted.

Image data input from an image input section 10 is
stored in a memory section 21. The image data storage
formats in the memory section 21 in the second embodiment
15 will be described with reference to Fig. 7.

Image data from the image input section 10 is input
to the memory section 21 as a file 71 shown in Fig. 7. As
the characteristic feature of this embodiment, the input
image data contains reduced image information.

20 The reduced image information means not reduced image
data itself but information used to generate a reduced image.
Assume that the original image is constructed by
plane-sequential RGB pixels each having 1 byte data, and
a reduced image (preview image) is generated by thinning
25 the addresses of pixels every 8 bytes. In this case, the
difference between a pixel obtained by accessing the

addresses every 8 bytes and the average value of pixels
(e.g., 8 x 8 pixels) around the pixel is obtained in advance
and stored in the file 71 as reduced image information. In
use of this reduced image information, when the original
5 image is a graphic image generated by a computer or the like,
the ratio of pixels whose difference from peripheral pixels
is 0 is considerably high, and the compression ratio in
compressing the reduced image information can be improved.

The reduced image information in the second
10 embodiment can have not only the above-described
plain-sequential structure but also a structure formed in
units of rectangular areas.

In the second embodiment, although the reduced image
data itself is not independently present in the file 71,
15 reduced image information for generating reduced image data
at a high speed from the original image data or part of data
based on the original data is added in advance to the image
file 71 in the form of, e.g., a tag.

Referring to Fig. 7, reference numeral 70 denotes a
20 general idea of various programs executed by a CPU 30. The
image data file 71 input from the image input section 10
is converted into a file 72 with an application internal
format by the CPU 30, then into a file 73 with an OS internal
format, and finally into a file 74 with a printer driver
25 internal format.

In the second embodiment as well, the reduced image

information contained in the input image file 71 must be transferred to the printer driver, as in the first embodiment. Even when the image file 71 contains no reduced image information, reduced image information must be
5 supplied to the printer driver. To cope with this, the application may add extension information representing reduced image information to the members of the data structure of the file 71.

Referring back to Fig. 6, processing by the printer
10 driver in the second embodiment will be described below. In the second embodiment, the printer driver generates reduced image data on the basis of the reduced image information added to the image file, as described above, and analyzes the reduced image to determine the gamma
15 correction value for printing.

First, a reduced image generation section 61 generates, on the memory 21, reduced image data on the basis of the input reduced image information. A look-up table (to be referred to as an LUT hereinafter) setting section
20 62 sets a color LUT 63 for color correction on the basis of the reduced image data. A method of setting the color LUT in the second embodiment will be described below with reference to the flow chart shown in Fig. 8.

In step S81, the reduced image information of image
25 data to be corrected is input. In step S82, the reduced image generation section 61 generates reduced image data

on the basis of the reduced image information. In step S83,
the LUT setting section 62 analyzes the reduced image data.
More specifically, a pixel average value is calculated to
obtain a gamma correction value, as in the above-described
5 first embodiment, or a white point is calculated to correct
the light source.

In step S84, a correction value (gamma correction
value or light source correction value) is obtained on the
basis of the analysis result. In step S85, the color LUT
10 63 is generated on the basis of the obtained correction
value. An appropriate color LUT may be selected from a
plurality of LUTs prepared in advance.

An LUT conversion section 64 shown in Fig. 6
appropriately converts the RGB values of the input image
15 data using the color LUT 63 selected or generated on the
basis of the reduced image data, as described above. The
image data is sent to a color space compression section 25
on the output side. The subsequent processing is the same
as in the first embodiment, and a detailed description
20 thereof will be omitted.

As described above, according to the second
embodiment, the reduced image is generated on the basis of
the reduced image information of the input image, and
various correction values are determined on the basis of
25 the reduced image data. Hence, even when the input image
does not have the reduced image data itself, the image can

be appropriately corrected in a short time.

<Third Embodiment>

The third embodiment of the present invention will be described below. In the third embodiment, in addition
5 to image correction processing in the above-described first and second embodiments, flexible print environment setting by the user is allowed.

The general idea of operation in the third embodiment will be described first. Figs. 9A to 9C and 10A to 10C are
10 views showing examples of display windows for printer color adjustment on an operation section 12.

Fig. 9A shows a window W11 as a printer color adjustment window. In the window W11, when "Auto Color Manager" is selected for normal printing by the printer,
15 appropriate correction processing is performed in accordance with image data to be printed.

If a gamma correction tag can be used in image data to be printed, correction using the gamma correction tag is automatically done. If no gamma correction tag can be
20 used, the reduced image of the image is searched for. If the reduced image is present, the gamma correction value is determined by analyzing the reduced image. If no reduced image is present, the gamma correction value is determined by analyzing the entire image data. In this way, in the
25 "Auto Color Manager" mode, optimum processing is automatically selected for printing.

The above-described gamma correction tag is one of expansion information tags added to an image file by an application or the like such that the image file is adapted to the printing method of the printer. When an image file is transferred to the printer driver, the gamma correction value already belongs to the image file.

A method of setting image correction parameters for an image file will be described with reference to Figs. 10A to 10C. In the method to be described below, after an original image file A is opened, an appropriate gamma value (e.g., 1.2) for the image is set, and the file is stored as an image file A', as shown in Fig. 10A.

In the third embodiment, one of three choices as options can be selected to store an image file to be corrected. Fig. 10B shows an operation window having radio buttons for this selection. As the first method, image data is gamma-corrected to rewrite the image data itself, and the rewritten image data is stored. That is, the original image disappears basically. As the second method, only a tag of gamma correction information is added (or updated) to the image file without changing the original image data. In this case, the date of file update is rewritten. As the third method, the original file is not changed, and only the information portion in a resource file that holds detailed information associated with the original file is updated. In the third embodiment, the

gamma correction value for the image file is set by selecting one of these three methods.

Fig. 10C shows the structure of the image file A' stored after correction. The corrected gamma correction value tag of the image file A' corresponds to information tag in the second method or the gamma information portion in the resource file in the third method.

In the third embodiment, by the above-described method, image correction parameters can be added to the inside of the image file to be corrected.

A case wherein "manual setup" is selected in the window W11 shown in Fig. 9A will be described below. When "manual setup" is selected, the "set details" button that is grayed in the "Auto Color Manager" mode becomes selectable. When the "set details" button is clicked, a window W12 shown in Fig. 9B is displayed.

When "user designation" is selected in the window W12, the user can arbitrarily designate the "gamma correction value" or arbitrarily select the "color LUT" for color correction from the selection menu by the user's decision.

When a selection item other than "user designation" is selected in the window W12, i.e., automatic processing is set, gamma processing or the like for image correction is set in accordance with the printing situation on the printer driver side.

For example, when "analyze preview image of file" is

selected, and a preview image (reduced image) corresponding to the file to be printed is present, the preview image is analyzed to determine the gamma correction value. Even when an image correction tag is present in the image file, 5 the tag is neglected. If no preview image is present for the file, the same processing as in selection of "analyze in printing" is forcibly executed.

Similarly, when "use gamma correction tag" is selected, and the image file has no gamma correction tag, 10 the same processing as in selection of "analyze in printing" is forcibly executed.

In any case, to analyze the image in printing, the current set values are used as various set values for analysis. If setting for analysis has not been done at all, 15 default values are used.

When "analyze in printing" is selected in the window W12, the image is analyzed in printing while neglecting the gamma correction tag added to the image file. In this case, conditions can be set in more detail. For example, when 20 "analyze in printing" is selected, and the "set" button is clicked, a window W13 shown in Fig. 9C is displayed. In the window W13, the user can arbitrarily set various parameters including a reference average density value (TRD), positive direction of correction width (AH), 25 negative direction of correction width (AL), and correction intensity (WGT).

By setting the various parameters, the gamma correction value can be calculated by the following method.

Let L_v ($L_v \neq 0$) be the average lightness of the printing image, TRD (about 128 ± 40) be the reference average density value, and VMAX ($V_{MAX} \neq 0$) be the maximum density value. When the image has 24-bit RGB data, a reference lightness L_t is given by

$$L_t = TRD/V_{MAX} \quad \dots (4)$$

In the example shown in the window W13, $L_t = 98/255 = 0.3828$.

10 An upper limit AH of the correction gamma value is defined by the function CfM(), and a lower limit AL is defined by the function CfS(). A reference correction gamma value Gvx is given by

$$G_{vx} = CfS(CfM(\ln(L_t)/\ln(L_v))) \quad \dots (5)$$

15 (where $\ln()$ is a natural logarithmic function)

A correction gamma value Gv is represented as follows using the correction intensity WGT.

$$G_v = 1.0 - WGT + G_{vx} \times WGT \quad \dots (6)$$

20 In the window W13, the calculated correction gamma value Gv is displayed as a graph for visual recognition.

In this way, the correction gamma value Gv is calculated using the correction intensity WGT. For this reason, even in a document including a plurality of images, the data can be corrected in only a small amount, i.e.,
25 damage to the original average density of each image can be minimized.

Assume that a document having a plurality of images A and B is printed by setting the reference average density value TRD at 98, and the average densities of the images A and B are 90 and 110, respectively. When the

5 above-described calculation is executed, the gamma correction value applied to the image A is 0.959 at a correction intensity of 50% or 0.918 at a correction intensity of 100%. The gamma correction value applied to

10 the image B is 1.068 at a correction intensity of 50% or 1.136 at a correction intensity of 100%. As described above, when the gamma correction value is close to 1.0, the original image is weakly corrected without damaging the average density of the image. In the third embodiment, since the correction intensity WGT can be arbitrarily set,

15 the user can arbitrarily set the gamma correction intensity, i.e., the degree of storage of the average density of the original image.

As described above, the gamma correction value Gv obtained when "analyze in printing" is selected in the

20 window W12 is valid with priority over tag information added to the original image file. Hence, even when the gamma correction value has already been set at 1.2 for the image file A, this setting is neglected, and a new gamma correction value calculated on the basis of current setting

25 is used.

As described above, according to the third embodiment,

the user can set the image analysis timing and correction parameters, and high-speed printing with an arbitrary image quality is possible.

<Fourth Embodiment>

5 The fourth embodiment of the present invention will be described below. An image processing apparatus according to the fourth embodiment has the similar arrangement as that shown in Fig. 1 described in the first embodiment, and a detailed description thereof will be
10 omitted.

Fig. 11 is a block diagram showing the functional arrangement in an image processing section 11 according to the fourth embodiment. The same reference numerals as in Fig. 2 described in the first embodiment denote the same
15 parts in Fig. 11, and a detailed description thereof will be omitted.

Image data input from an image input section 10 is stored in a memory section 21 and added with a gamma value tag by a gamma value tag addition section 28. This gamma
20 value tag addition processing will be described below.

Fig. 12 is a flow chart of gamma value tag addition processing in the fourth embodiment. First, in step S101, the user sets, from an operation section 12, a file to which the gamma value tag is to be added. In step S102, if the
25 execution conditions are satisfied, gamma value tag addition processing is executed.

A method of setting the file to be processed and execution conditions will be described with reference to Figs. 13 and 14A to 14E.

Fig. 13 is a view showing an example of a display window in setting the file to be processed and execution conditions. In a window W21 shown in Fig. 13, the tree structure of files is displayed to allow the user to search for and set the file to be processed. More specifically, in the window W21, since the overall structure of the file system is expressed as a tree structure, the user can easily select a desired file path using a mouse cursor or the like. For the designated file path, for example, the background color is inverted to show that the file path is selected.

After the "file to be processed" and "automatic execution schedule" are set, the user clicks the "OK" button to instruct job scheduling. In any item, processing is executed by designating "default" without any cumbersome setting processing. This default setting can also be changed by "set details".

A plurality of files can be designated as files to be processed by designating the file path or the like. To set the files to be processed, the type of files, date of processing, and the like can be combined as conditions items. More specifically, in the "file to be processed" shown in Fig. 13, the "set details" button is clicked to display a window W22 shown in Fig. 14A. When the "type of file",

5 "date condition", and "others" in the window W22 are clicked, windows W23, W24, and S25 shown in Figs. 14B to 14D are displayed, respectively. The files to be processed can be flexibly searched for and set on the basis of conditions of user's choice.

When the "set details" button in "automatic execution schedule" in Fig. 13 is clicked, a window W26 shown in Fig. 14E is displayed. In this window, "execution user (who has file access authority)", "priority" as a back
10 process, or "execution time designation" can be arbitrarily set. For example, by "execution time designation", other jobs are less executed in the image processing apparatus or a system including this apparatus. Efficient operation can be expected by designating automatic execution, e.g.,
15 at night. Automatic execution may be started, stopped, or resumed in accordance with the load situation of the entire system while monitoring the load situation of a CPU 30 or the like.

Referring back to Fig. 12, when processing starts in
20 step S102, it is determined in step S103 whether gamma value tag addition processing is to be ended, by comparing the path map to be searched with the current path.

If NO in step S103, the flow advances to step S104 to access a file on the current path. In step S105, it is
25 determined whether the file is the file to be searched, which is set in step S101. If YES in step S105, a gamma

value tag is searched for by looking up the header information, tag data, and the like in the file in step S106. When a gamma value tag is detected, i.e., the file already has a gamma value tag, the flow advances to step S107 to
 5 determine whether the tag can be overwritten. If YES in step S107, the flow advances to step S108. If NO in step S107, the flow returns to step S103.

When no gamma value tag is detected in step S106, i.e., no gamma value tag has been added to the file yet, the flow
 10 advances to step S108.

In step S108, image data (RGB values) is read out from the searched file. In step S109, a gamma value Gv is calculated on the basis of the image data. For example, as in steps S51 to S53 shown in Fig. 5 of the above-described
 15 first embodiment, data Lv is obtained by normalizing the average lightness value of all pixels in accordance with equations (1) and (2), and the correction gamma value Gv is calculated on the basis of the data Lv in accordance with equation (3).

20 In step S110, the correction gamma value Gv is written in the image file as a gamma value tag.

Processing of adding the gamma value tag in this embodiment will be described with reference to Figs. 15A and 15B. Fig. 15B shows the structure of image data
 25 obtained by adding (N + 1)th tag data 603 to image data shown in Fig. 15A. The correction gamma value Gv obtained in step

S109 of Fig. 12 is written in the (N + 1)th tag data 603.

In the fourth embodiment, the correction gamma value Gv is added into the image file as simple tag data and therefore does not influence the original image data or other information. Hence, the image file added with the gamma value tag can be returned to the original file anytime as needed.

As described above, the gamma value tag addition section 28 analyzes image data and obtains an appropriate gamma correction value for one image file, and adds or updates the gamma correction value as new tag data. Processing in steps S103 to S110 of Fig. 12 is repeated for all image files to be processed on the path to be searched.

It is more preferable that the series of processing shown in the flow chart of Fig. 12 be loaded as a back process job or a demon program executed in, e.g., an operating system capable of executing a multi-process.

As described above, when a gamma value tag is added to an image file, the time required for correction processing in printing the image file can be shortened. Correction of an image file added with a gamma value tag will be described below.

The image data storage formats in the memory section 21 will be described with reference to Fig. 16.

Referring to Fig. 16, image data added with a gamma value tag is stored in the memory section 21 as a file 71.

The file 71 has the above-described structure shown in Fig. 15B. More specifically, "magic number", "version information", and "directory offset" in Fig. 15B correspond to the header information of the file 71 shown in Fig. 16, "tag 1" to "tag N" correspond to the standard tag set, and "tag (N + 1)" corresponds to the gamma value tag.

Referring to Fig. 16, reference numeral 70 denotes a general idea of various programs executed by the CPU 30. The image data file 71 having the gamma value tag is converted into a file 72 with an application internal format by an application executed by the CPU 30. To print the image file by a printer, the file is further converted into an OS internal format 73 and then into a printer driver internal format 74.

In the fourth embodiment, the gamma value tag held by the input image file 71 must be transferred to the printer driver. To transfer the gamma value tag ("tag (N + 1) in Fig. 15B) to the printer driver, for example, the application adds an extension information area to the normal data structure.

Referring back to Fig. 11, processing by the printer driver will be mainly described below. As described above, the printer driver executes gamma conversion on the basis of the gamma value tag added to the image file.

First, a gamma table generation section 22 generates

a gamma correction table 23 on the basis of the gamma value tag. An optimum one of a plurality of gamma tables prepared in advance may be selected and set as the gamma correction table 23.

5 Subsequently, as in the first embodiment, RGB data in the image file are subjected to gamma conversion, color space compression, color conversion, and binarization, and then output to an image output section 15 as a printer engine section.

10 As described above, according to the fourth embodiment, an appropriate correction parameter is determined in advance for image data stored in the file system and recorded in the extension tag of the file. Hence, the image can be appropriately corrected at high speed with
15 reference to the tag information in printing.

 According to the fourth embodiment, since gamma curve generation is performed during the execution time period designated in the window shown in Fig. 14E, reduced image data is not used, but the original image data can be analyzed
20 to obtain a gamma value. By virtue of using original image data instead of reduced image data, highly precise analysis can be performed. As has been explained in the first embodiment, reduced image data is generated based on original image data, and has a smaller data amount than that
25 of the original image data.

 As a modification of the fourth embodiment, a mode

utilizing a gamma curve generation method which employs the reduced image data explained in the first embodiment, may be added. In this mode, although precision may be deteriorated compared to the mode using the original image data, high speed processing is realized. By enabling to select a mode from these two modes according to user's designation, the apparatus can support various user requirements.

<Fifth Embodiment>

10 The fifth embodiment of the present invention will be described below.

 In the above-described fourth embodiment, image data in a file is analyzed to set an appropriate gamma correction value as a gamma value tag. In the fifth embodiment, the user can arbitrarily set gamma correction parameters.

 Fig. 17A is a view showing an example of a display window in an operation section 12 when setting detailed conditions for image correction (in this case, gamma correction) processing. In Fig. 17A, a description of setting items common to Fig. 13 described in the above fourth embodiment will be omitted. According to a window W27 shown in Fig. 17A, in addition to searching and setting a file to be processed and setting the automatic execution schedule by the user, details for gamma correction for image data of a file to be processed can be set.

 When the "set details" button in "processing to be

executed" is depressed, a window W28 shown in Fig. 17B is displayed. In the window W28, the user can confirm and change current settings of various parameters (to be referred to as gamma correction parameters hereinafter) used for gamma correction, including a reference average density value (TRD), positive direction of correction width (AH), negative direction of correction width (AL), and correction intensity (WGT). Normally, for example, TRD = 98, AH = 1.2, and AL = 0.8 are set as default values.

10 In the fifth embodiment, by setting the gamma correction parameters, a gamma correction value is calculated by the following method.

As for equation (5) of the second embodiment, let L_v ($L_v \neq 0$) be the average lightness of the printing image and VMAX ($V_{MAX} \neq 0$) be the maximum density value. An upper limit AH and lower limit AL of the correction gamma value are defined by the functions $CfM()$ and $CfS()$, respectively. A correction gamma value G_v in the fifth embodiment is given by

$$20 \quad G_v = CfS(CfM(\ln(TRD/V_{MAX})/\ln(L_v))) \quad \dots (7)$$

(where $\ln()$ is a natural logarithmic function)

When the calculated correction gamma value G_v is added to the image file as extension tag information, flexible gamma correction can be performed.

25 As described above, according to the fifth embodiment, the user can set gamma correction parameters, and

high-speed printing with an arbitrary image quality can be performed.

<Sixth Embodiment>

The sixth embodiment of the present invention will
5 be described below.

In the above-described fourth and fifth embodiments,
the gamma correction value is added to the file as tag
information in advance to omit cumbersome processing such
as image analysis in printing, thereby realizing efficient
10 processing. In some cases, however, printing without
using the gamma correction value set in advance is required.
In the sixth embodiment, the gamma correction tag added to
the image file can be invalidated.

Figs. 18A to 18C are views showing examples of
15 display windows in an operation section 12 for color
adjustment in printing in the sixth embodiment. For an
image file having a gamma correction tag, when "Auto Color
Manager" is selected in a window W31 shown in Fig. 18A, the
image data is always corrected by bitmapping the data in
20 a gamma table on the basis of the gamma correction value
and then printed.

If the gamma correction tag already added to the image
file is not to be used, the user selects "manual setup" in
the window W31. When the "default" button in the window
25 W31 is clicked, a set value that is set in advance is set
independently of the gamma correction value. When the "set

details" button is clicked, a window W32 shown in Fig. 18B is displayed. When the user needs no gamma correction in printing, the user selects "non-use of gamma correction tag" in the window W32. When "use gamma correction tag" is selected in the window W32, gamma correction based on the gamma correction tag added to the image file is executed, as in selection of "Auto Color Manager" in the window W31.

When gamma correction parameters are to be newly set in printing, "use setting in printing" is selected in the window W32, and the "set" button is clicked to display a window W33 shown in Fig. 18C. In the window W33, the user can arbitrarily set various parameters including a reference average density value (TRD), positive direction of correction width (AH), negative direction of correction width (AL), and correction intensity (WGT). By setting these various parameters, a gamma correction value can be calculated in consideration of setting of the correction intensity WGT following the same procedures as in the above-described third embodiment.

The gamma correction value obtained when "use setting in printing" is selected in the window W32, as described above, is valid with priority over tag information added to the original image file. Hence, even when the gamma correction value has already been set at, e.g., "1.2" for image data, this setting is neglected, and a new gamma correction value calculated on the basis of current setting

is used.

In the sixth embodiment, use or non-use of the gamma correction tag is determined in color adjustment. This determination can be made at any timing as long as
5 convenience for use is taken into consideration. For example, information set in advance may be invalidated at the time of printing, and the user may set information again at that time.

As described above, according to the sixth embodiment,
10 the user can set the correction parameters, and high-speed printing with an arbitrary image quality is possible.

In addition to the image analysis method based on the average density value of all pixels, which is described in the first to sixth embodiments, more advanced and complex
15 gamma correction and color correction methods are present. For example, an original image is segmented into areas, and the average density value is calculated in units of areas. Alternatively, an area such as a shadow portion, highlight portion, or intermediate density portion is detected, and
20 the entire image is corrected to an optimum tone that is neither too dark nor too bright.

The same effect as that of the present invention can be substantially obtained by employing any analysis method as far as the image data is appropriately analyzed,
25 parameters for image correction are calculated, the parameters are recorded in tag data or the like without

damaging the originality of the image data, and appropriate correction processing is automatically executed in printing on the basis of information such as the tag data.

The control program for image analysis may be realized by a demon program in a server, occasionally forked (executed) from an application program, or executed simultaneously with the start of the printer menu or the start of printing.

The image data is bitmapped in the memory 21 in the image processing section 11. However, the present invention is not limited to this. The RAM in the apparatus or an external storage device may be used as far as it can be used as an image memory.

Setting of gamma correction parameters has been particularly described. However, the present invention can also be applied to other image processing parameters.

As has been described above, according to the present invention, appropriate correction processing can be performed at a high speed by determining correction parameters at a high speed on the basis of reduced image information of an image to be corrected.

In addition, since the user can arbitrarily set various parameters associated with image correction, a more preferable print environment can be provided.

Furthermore, since correction parameters are determined for image data held in the apparatus and added

to the image data file in advance, high-speed image output processing can be performed at the time of output.

[Other Embodiments]

The present invention may be applied to a system
5 constituted by a plurality of devices (e.g., a host computer, an interface device, a reader, a printer, and the like) or an apparatus comprising a single device (e.g., a copying machine, a facsimile apparatus, or the like).

The object of the present invention is realized even
10 by supplying a storage medium storing software program codes for realizing the functions of the above-described embodiments to a system or an apparatus, and causing the computer (or a CPU or an MPU) of the system or the apparatus to read out and execute the program codes stored in the
15 storage medium. In this case, the program codes read out from the storage medium realize the functions of the above-described embodiments by themselves, and the storage medium storing the program codes constitutes the present invention. As a storage medium for supplying the program
20 codes, a floppy disk, a hard disk, an optical disk, a magnetooptical disk, a CD-ROM, a CD-R, a magnetic tape, a nonvolatile memory card, a ROM, or the like can be used.

The functions of the above-described embodiments are realized not only when the readout program codes are executed
25 by the computer but also when the OS (Operating System) running on the computer performs part or all of actual

processing on the basis of the instructions of the program codes.

5 The functions of the above-described embodiments are also realized when the program codes read out from the storage medium are written in the memory of a function expansion board inserted into the computer or a function expansion unit connected to the computer, and the CPU of the function expansion board or function expansion unit performs part or all of actual processing on the basis of the instructions
10 of the program codes.

When the present invention is applied to the storage medium, it stores program codes corresponding to the above-described flow charts (Figs. 5, 8, 10, and 12).

15 As many apparently widely different embodiments of the present invention can be made without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the appended claims.

WHAT IS CLAIMED IS:

1. An image processing apparatus comprising:
input means for inputting reduced image information
of image data;

5 analysis means for analyzing the reduced image
information;

setting means for setting a correction parameter of
the image data on the basis of an analysis result; and

10 correction means for correcting the image data on the
basis of the correction parameter.

2. The apparatus according to claim 1, wherein
said input means inputs the reduced image information
contained in a file of the image data.

3. The apparatus according to claim 2, wherein
15 the reduced image information is reduced image data.

4. The apparatus according to claim 3, wherein
said apparatus further comprises display means for
displaying the image data, and

20 the reduced image data is a preview image displayed
on said display means prior to the image data.

5. The apparatus according to claim 2, wherein
the reduced image information is a pointer for
reduced image data.

6. The apparatus according to claim 1, wherein
25 said apparatus further comprises printing means for
printing and outputting the image data corrected by said

correction means, and

the correction parameter is a parameter for printing of the image data.

7. The apparatus according to claim 6, wherein

5 said setting means generates a table on the basis of the correction parameter.

8. The apparatus according to claim 7, wherein the table is a color look-up table.

9. The apparatus according to claim 6, wherein

10 the correction parameter is a gamma correction parameter.

10. The apparatus according to claim 1, wherein

15 said apparatus further comprises reduced image generation means for generating reduced image data on the basis of the reduced image information input by said input means, and

said analysis means analyzes the reduced image data generated by said reduced image generation means.

11. The apparatus according to claim 1, wherein

20 said apparatus further comprises instruction means for instructing one of automatic setting and manual setup for image data correction processing, and

when said instruction means instructs automatic setting, said analysis means searches for image information to be analyzed in a predetermined order and analyzes searched image information.

12. The apparatus according to claim 11, wherein
said analysis means searches for a gamma correction
tag and a reduced image of the image data in the order named.
13. The apparatus according to claim 12, wherein
5 when neither the gamma correction tag nor the reduced
image of the image data are searched, said analysis means
analyzes the image data itself.
14. The apparatus according to claim 12, wherein
the image data has a gamma correction value in one
10 of an information tag and a resource file in a self file.
15. The apparatus according to claim 11, wherein
when said instruction means instructs manual setup,
said instruction means further sets the correction
parameter.
- 15 16. The apparatus according to claim 15, wherein
said instruction means simultaneously sets a gamma
correction value and a color look-up table as correction
parameters.
17. The apparatus according to claim 15, wherein
20 said instruction means sets a reference average value
of pixels and a correction intensity as correction
parameters.
18. The apparatus according to claim 15, wherein
said instruction means sets upper and lower limit
25 values of correction as correction parameters.
19. An image processing method applied to an apparatus

capable of storing a plurality of files where image data is recorded, comprising:

a search step of searching a file corresponding to satisfying a predetermined condition;

5 a calculation step of analyzing image data stored in the file and calculating a correction parameter; and

a control step of controlling said calculation step at an execution timing set according to user's designation.

20. The image processing method according to claim 19, wherein the predetermined condition used in said search step is set according to user's designation, and the predetermined condition includes a type of file or a date condition or both.

21. The image processing method according to claim 19, further comprising an addition step of adding the correction parameter to the file.

22. The image processing method according to claim 19, further comprising a setting step of setting a condition to be used in said calculation step in accordance with user's designation.

23. A recording medium comprising program codes of an image processing method, at least comprising:

code means of a search step for searching a file corresponding to satisfying a predetermined condition;

25 code means of a calculation step for analyzing image data stored in the file and calculating a correction

parameter; and

code means of a control step for controlling said calculation step at an execution timing set according to user's designation.

5 24. An image processing apparatus comprising:

holding means for holding image data in a predetermined file format;

analysis means for analyzing the image data;

calculation means for calculating a correction
10 parameter of the image data on the basis of an analysis result; and

addition means for adding the correction parameter to a file of the image data.

25. The apparatus according to claim 24, wherein
15 said addition means adds the correction parameter as extension tag information of the file.

26. The apparatus according to claim 25, further comprising:

correction means for correcting the image data on the
20 basis of the tag information of the correction parameter added by said addition means.

27. The apparatus according to claim 26, wherein

said apparatus further comprises printing means for printing and outputting the image data corrected by said
25 correction means, and

the correction parameter is a parameter for printing

of the image data.

28. The apparatus according to claim 27, wherein
the correction parameter is a ~~gamma~~ correction
parameter.

5 29. The apparatus according to claim 24, further
comprising:

setting means for setting the image data from a
plurality of image data as data to be processed.

30. The apparatus according to claim 24, further
10 comprising:

setting means for setting a series of execution
schedules of said analysis means, said calculation means,
and said addition means.

31. The apparatus according to claim 26, wherein
15 said apparatus further comprises ~~setting~~ means for
setting a detailed parameter for determining the correction
parameter, and

said correction means calculates a correction
parameter on the basis of the detailed parameter set by said
20 setting means and corrects the image data on the basis of
the correction parameter.

32. The apparatus according to claim 31, wherein
said apparatus further comprises selection means for
selecting, as a parameter to be used, one of the correction
25 parameter added by said addition means and the correction
parameter based on the detailed parameter set by said

setting means, and

said correction means corrects the image data on the basis of the correction parameter selected by said selection means.

5 33. The apparatus according to claim 31, wherein the detailed parameter includes ~~one~~ of an average density value, a correction range, and a correction intensity.

34. An image processing method comprising:
10 an input step of inputting an image file;
a determination step of determining whether or not the image file includes preview image information;
a setting step of, in a case where the image file includes preview image information, analyzing the preview
15 image information and setting an image processing condition;
and

a generation step of, in a case where the image file does not include preview image information, generating preview image information from original image information
20 stored in the image file,

wherein the preview image information has a smaller amount of data than that of the original image information.

35. The image processing method according to claim 34, wherein in said setting step, the image processing condition
25 is set as an extension tag information of the image file.

36. The image processing method according to claim 35,

65320T" 45432460
further comprising a correction step of performing
correction processing on the image information based on the
tag information as an image processing condition.

37. A recording medium comprising program codes of an
5 image processing method, at least comprising:

code means of an input step of inputting an image file;

code means of a determination step of determining
whether or not the image file includes preview image
information;

10 code means of a setting step of, in a case where the
image file includes preview image information, analyzing the
preview image information and setting an image processing
condition; and

code means of a generation step of, in a case where
15 the image file does not include preview image information,
generating preview image information from original image
information stored in the image file,

wherein the preview image information has a smaller
amount of data than that of the original image information.

ABSTRACT OF THE DISCLOSURE

Conventionally, when a correction parameter is determined on the basis of the feature of an image obtained by analyzing image data, and the image is corrected, the processing speed becomes considerably low. In this invention, for an image file stored in an apparatus, reduced image data held in the file is analyzed to determine a correction parameter in printing, and the image is corrected on the basis of the correction parameter, thereby shortening the processing time. When an appropriate correction parameter is determined for an image file stored in the apparatus and added to the file in advance before printing, and the image is corrected on the basis of the correction parameter in printing, the processing time is further shortened.

FIG. 1

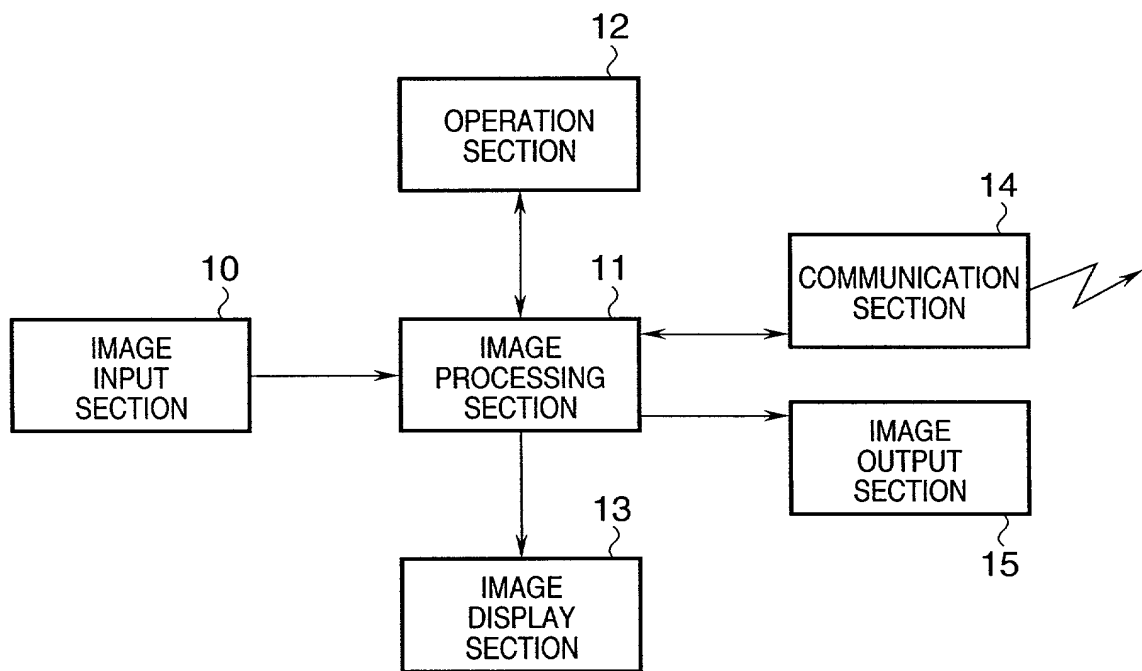


FIG. 2

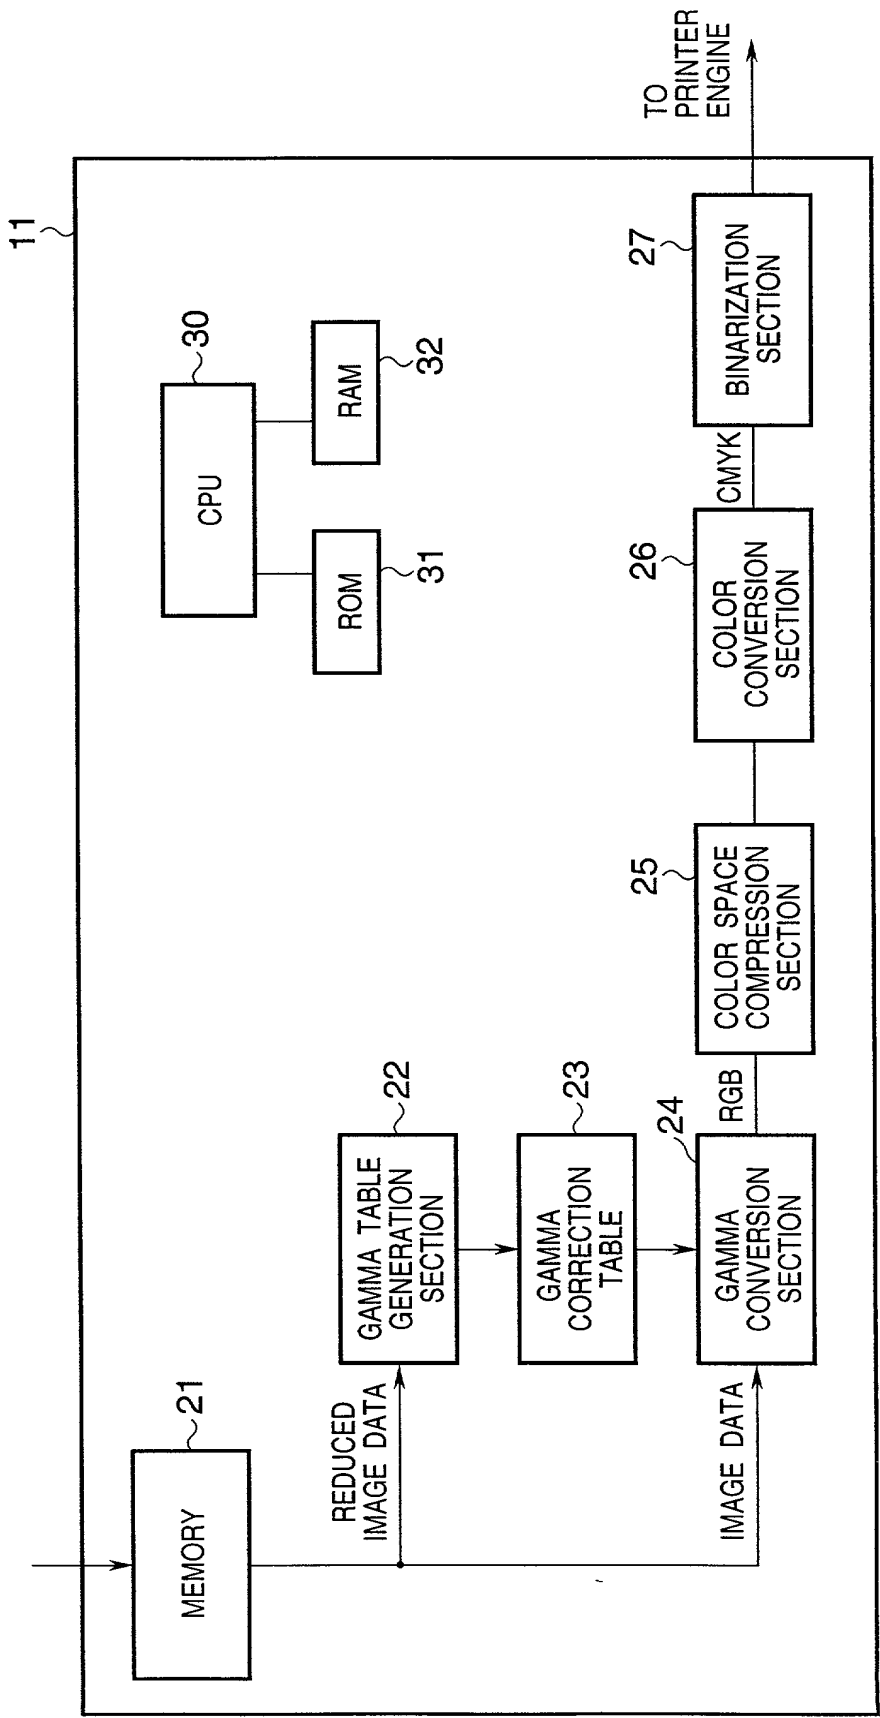


FIG. 3

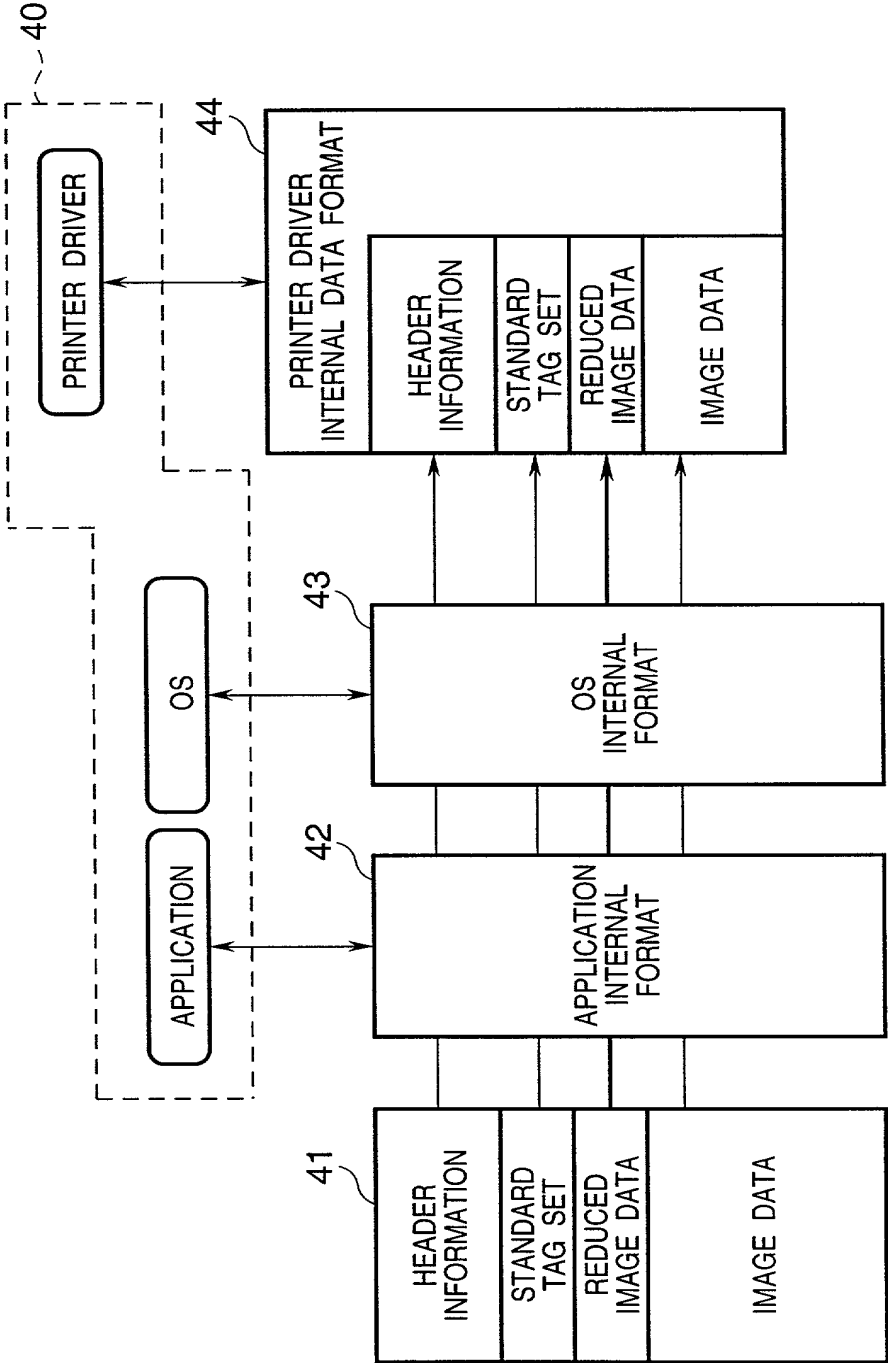


FIG. 4A

MAGIC NUMBER : 0x4f4f007b
VERSION INFORMATION : 0x01050000
DIRECTORY OFFSET : 0x008
TAG 1
TAG 2
⋮
TAG N
IMAGE DATA AND THE LIKE

FIG. 4B

MAGIC NUMBER : 0x4f4f007b
VERSION INFORMATION : 0x01050000
DIRECTORY OFFSET : 0x008
TAG 1
TAG 2
⋮
TAG N
REDUCED IMAGE DATA
IMAGE DATA AND THE LIKE

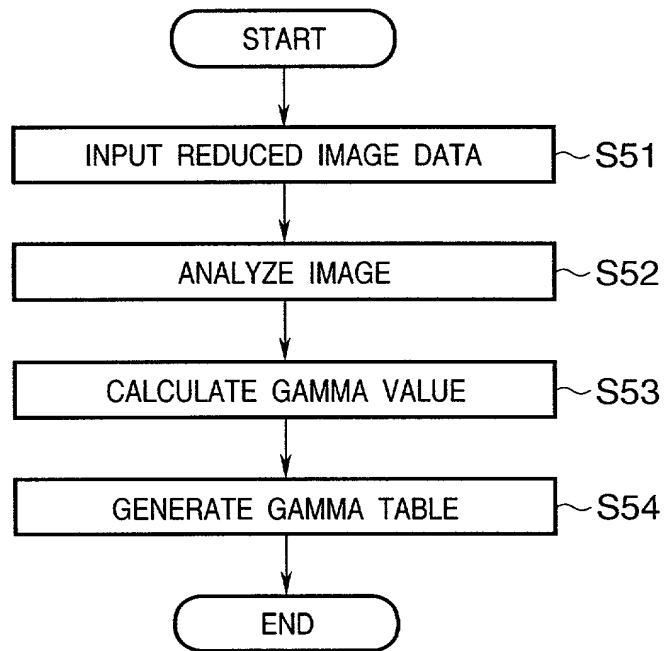
FIG. 5

FIG. 6

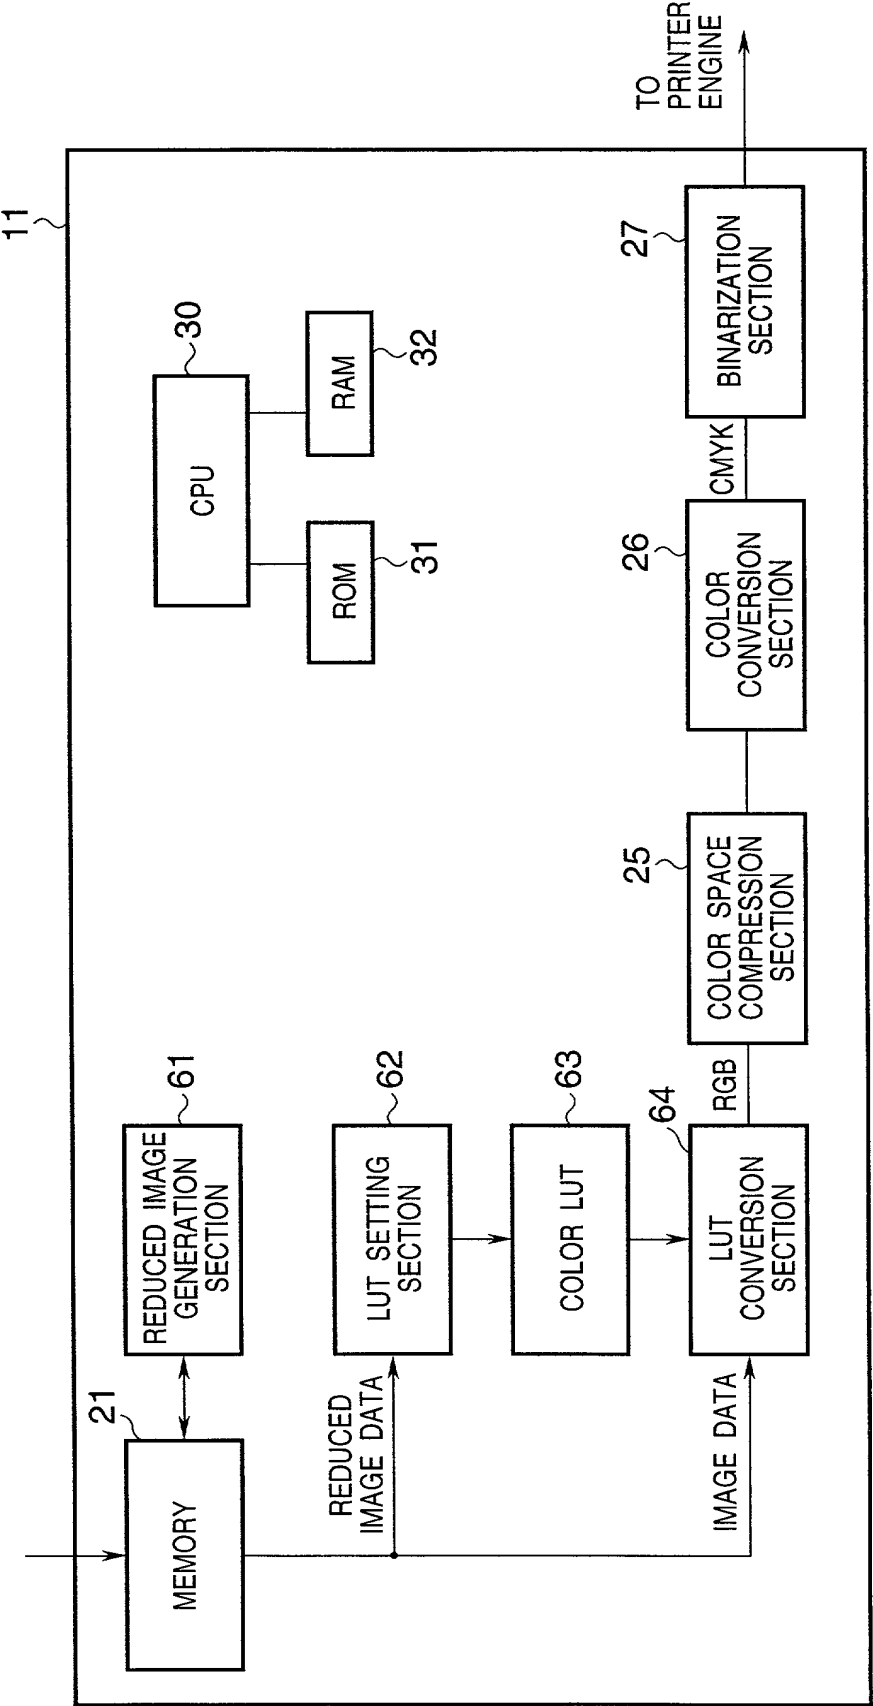


FIG. 7

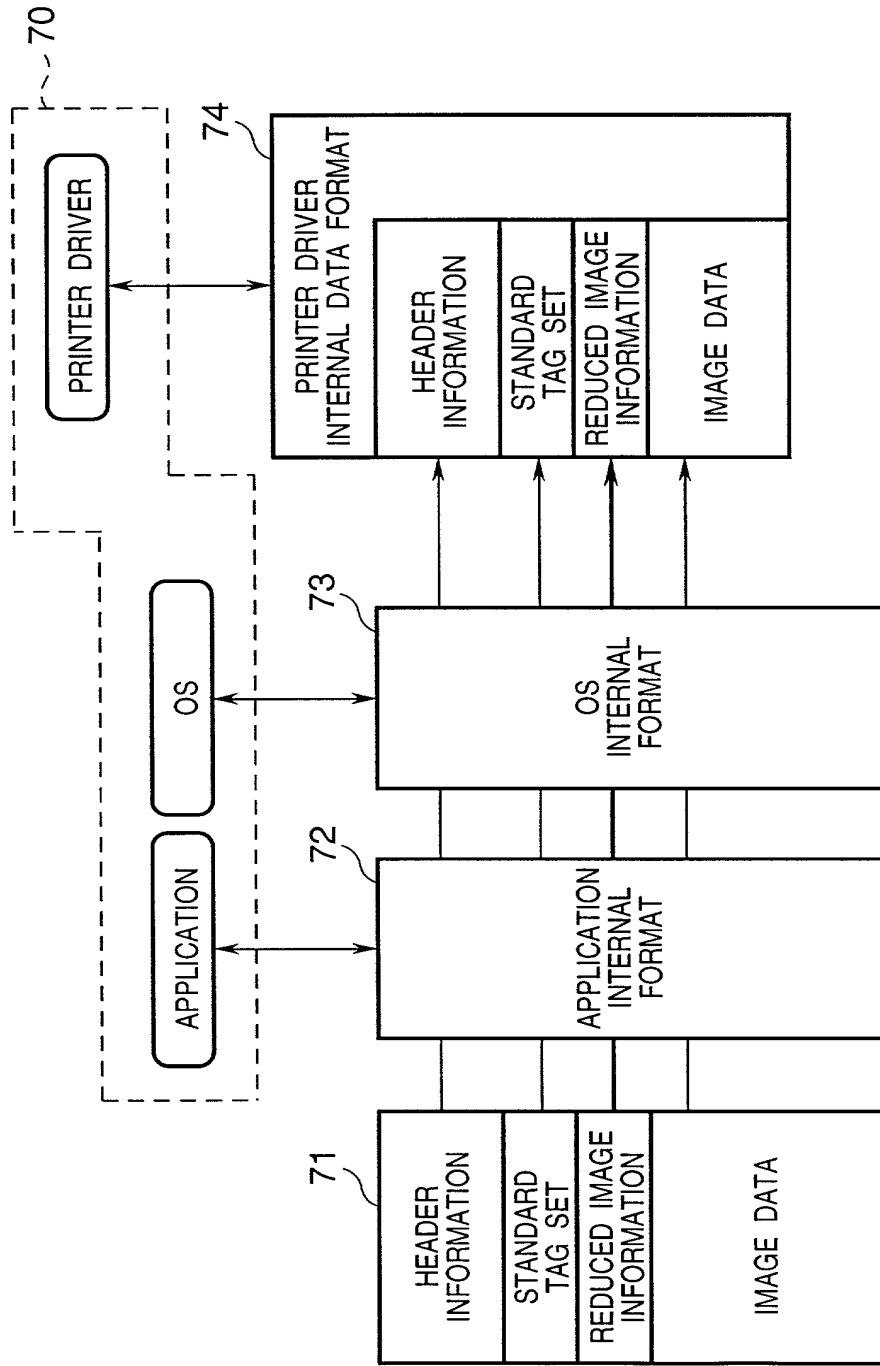


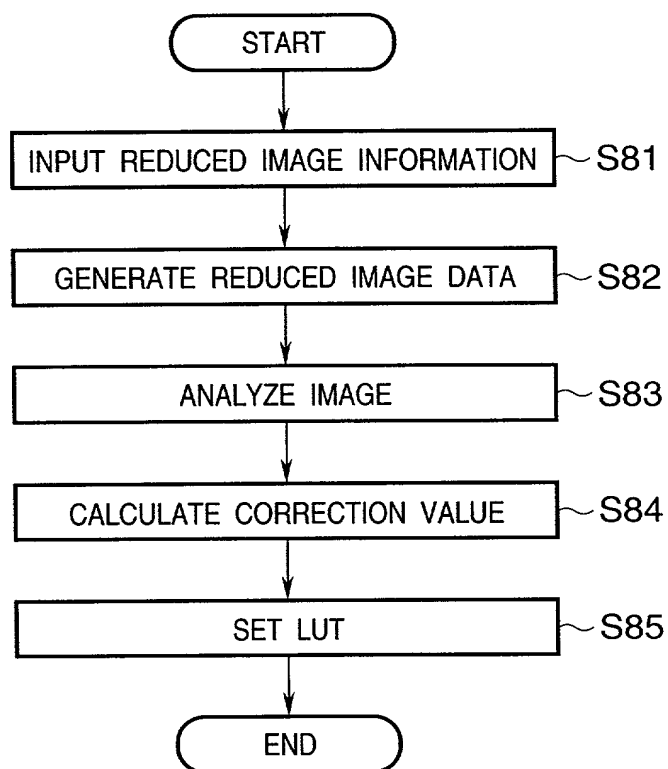
FIG. 8

FIG. 9A

W11

PRINTER COLOR ADJUSTMENT

☐ AUTO COLOR MANAGER
☒ MANUAL SETUP

FIG. 9B

W12

PRINTER COLOR ADJUSTMENT - SET DETAILS

USER DESIGNATION	GAMMA CORRECTION VALUE	COLOR LUT
<input type="radio"/>	<input type="text" value="1.12"/>	TYPE-A (CORRECT IMAGE WITH LOW SATURATION)

☐ USE GAMMA CORRECTION TAG (HIGH SPEED)
☐ ANALYZE PREVIEW IMAGE OF FILE
☒ ANALYZE IN PRINTING (ACCURATE)

FIG. 9C

W13

(TRD)

SET REFERENCE AVERAGE VALUE

98

CORRECTION INTENSITY

50%

(WGT)

SET CORRECTION WIDTH (AH)

+DIRECTION, UP TO 1.4

-DIRECTION, UP TO 0.78

(AL)

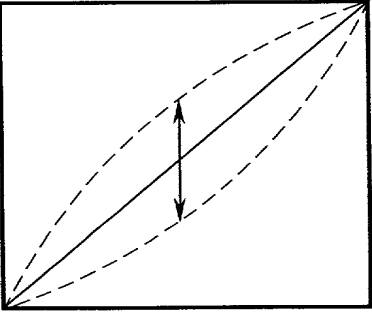


FIG. 10A

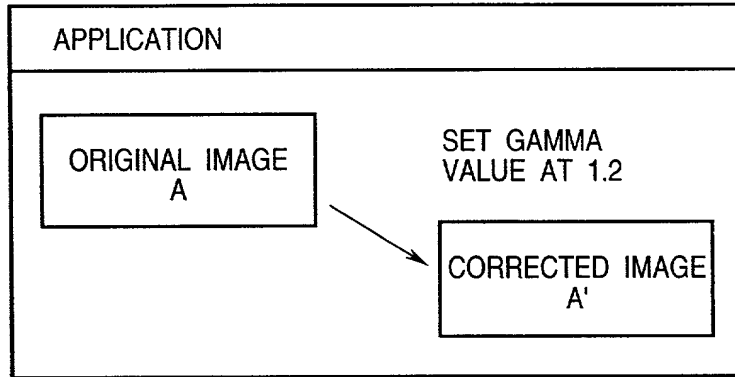


FIG. 10B

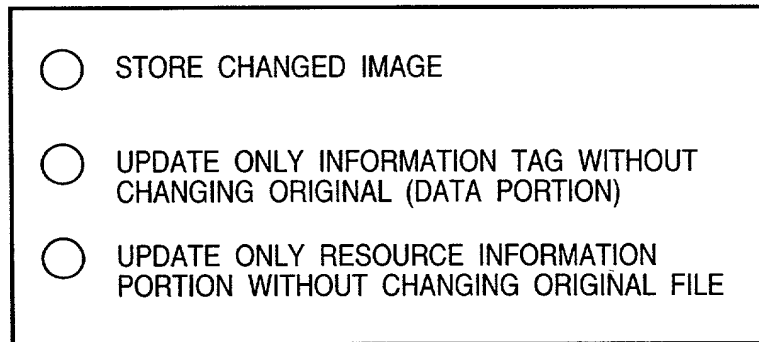


FIG. 10C

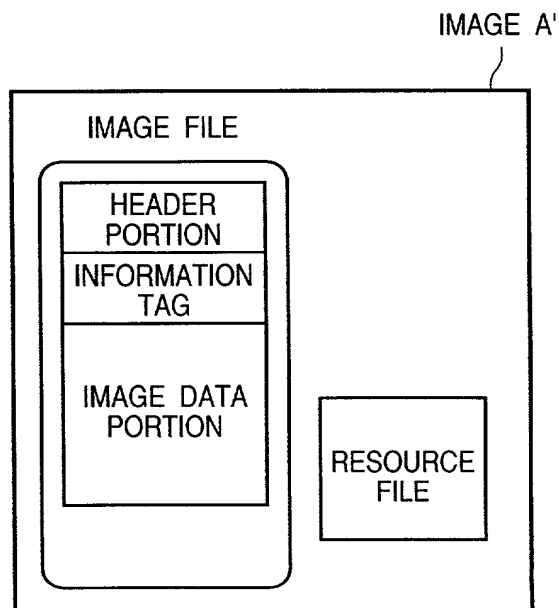


FIG. 11

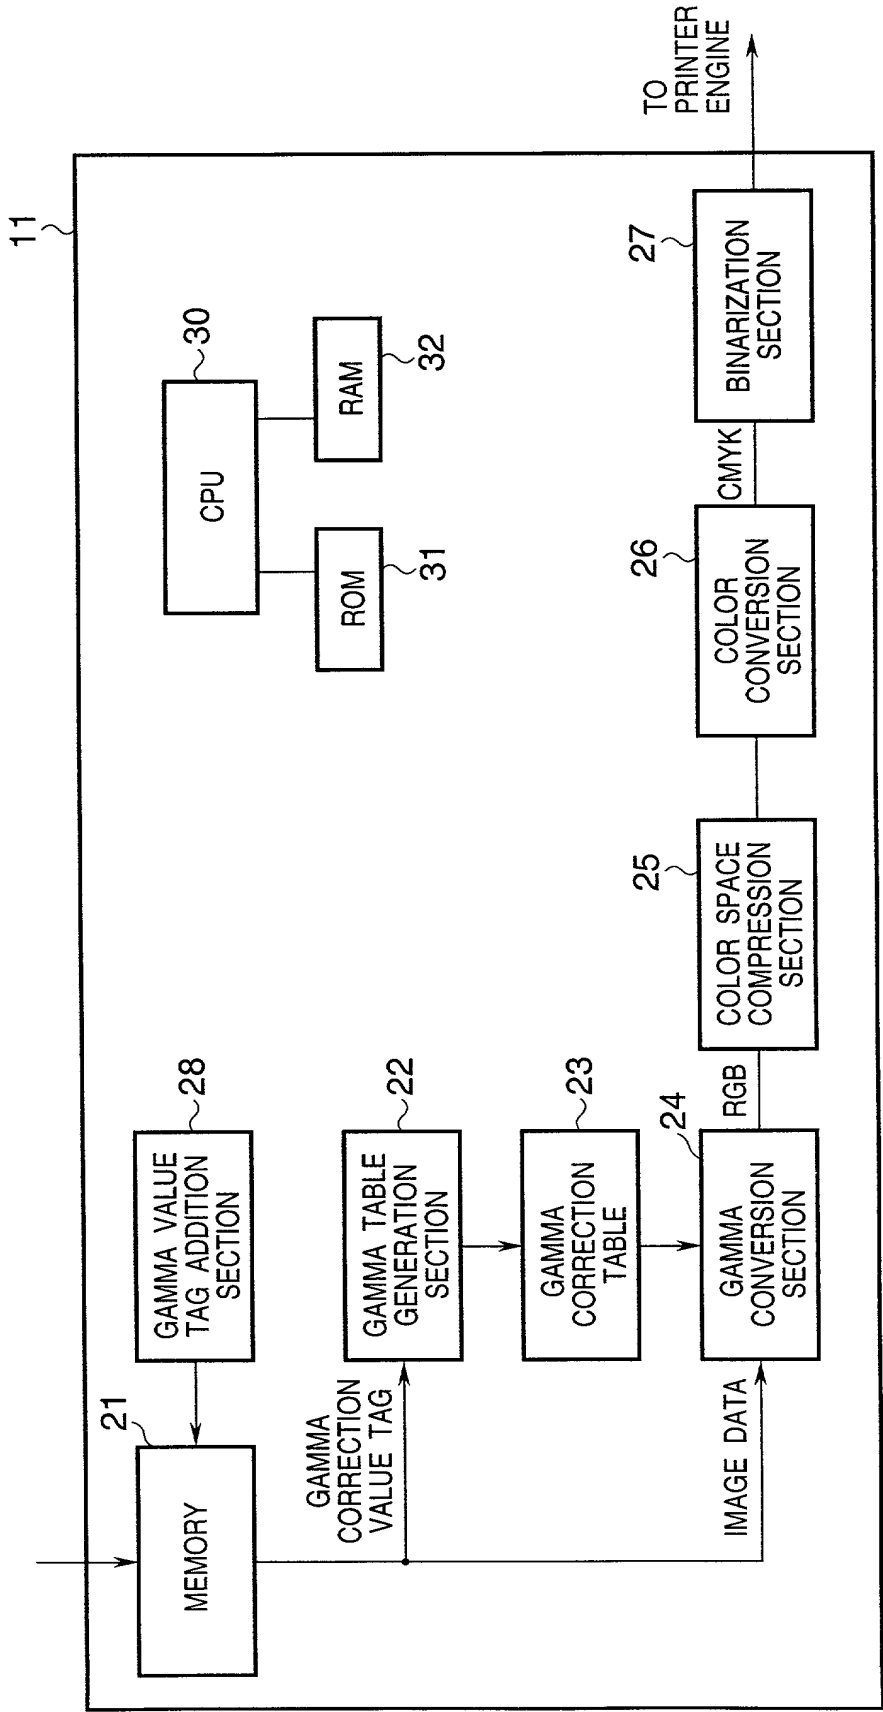


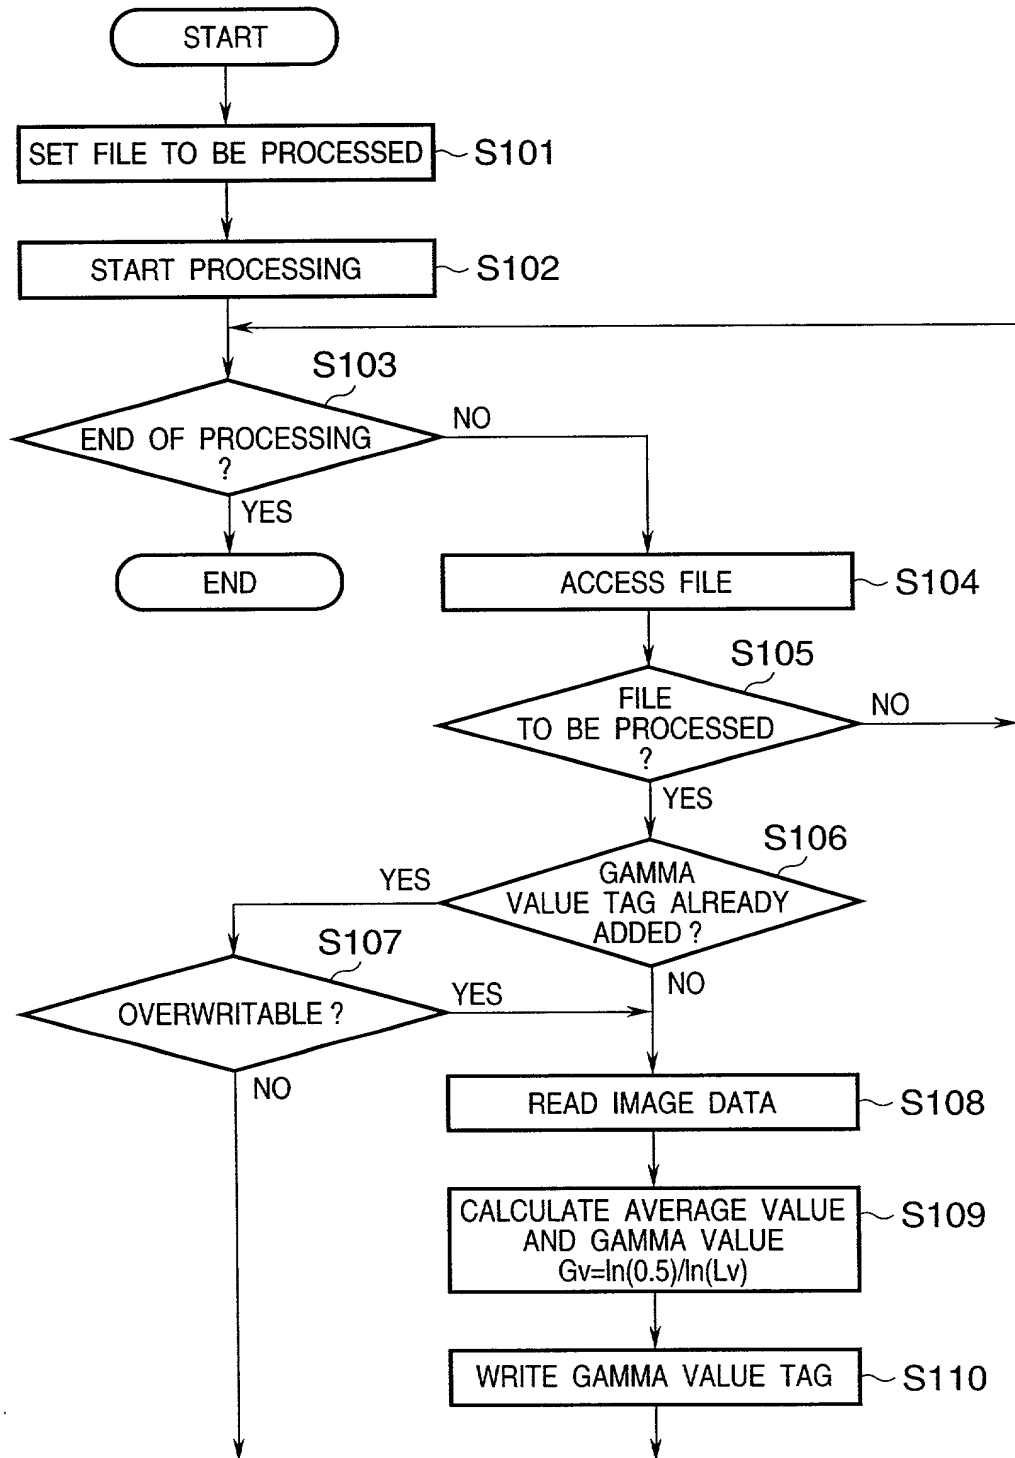
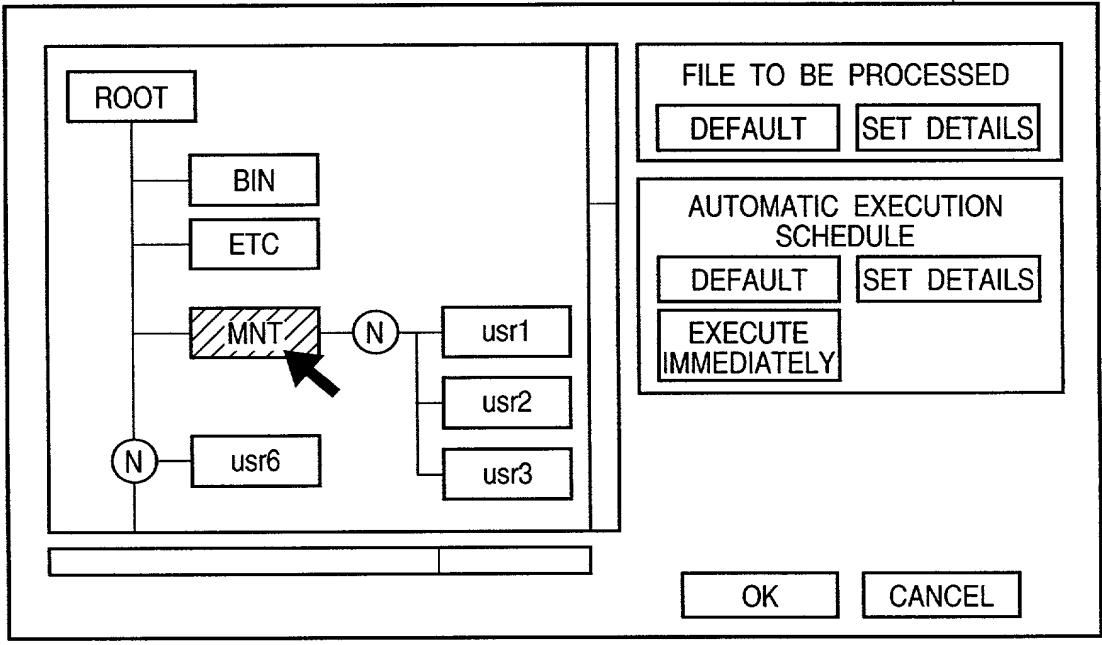
FIG. 12

FIG. 13

W21



Pub. No. 45432450

FIG. 14A

1.

2.

3.

CONDITION

W22

FIG. 14B

BMP IMAGE
DIF IMAGE
GIF IMAGE
PICT FILE IMAGE
WVI IMAGE

W23

FIG. 14C

☐

☐

W24

FIG. 14D

REGULAR EXPRESSION
MATCH OF FILE NAME

W25

FIG. 14E

EXECUTION USER

USER : IMG DEMON
PASSWORD : * * * * *

PROCESS MANAGEMENT

☒ DESIGNATE EXECUTION TIME

☐ CONDITIONAL EXECUTION

W26

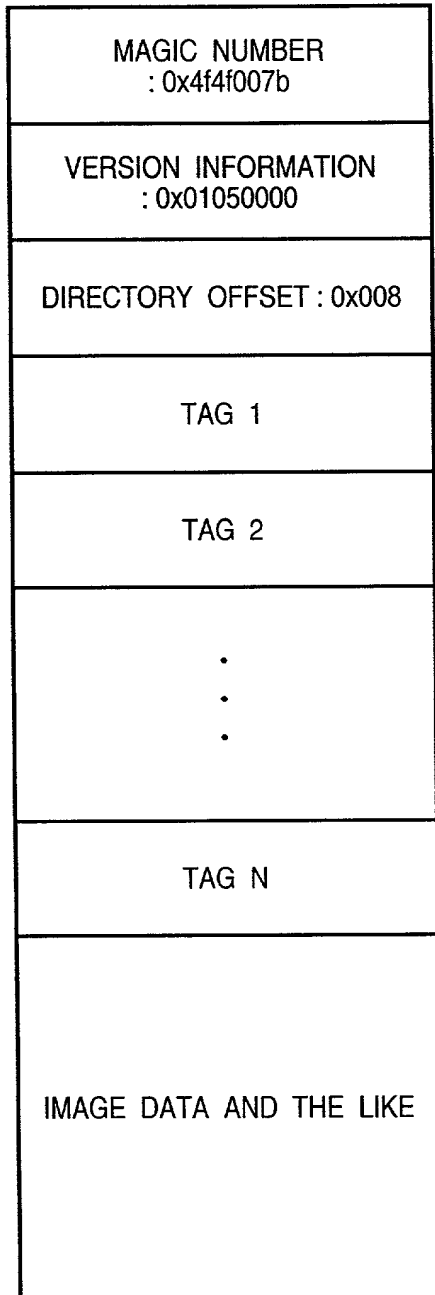
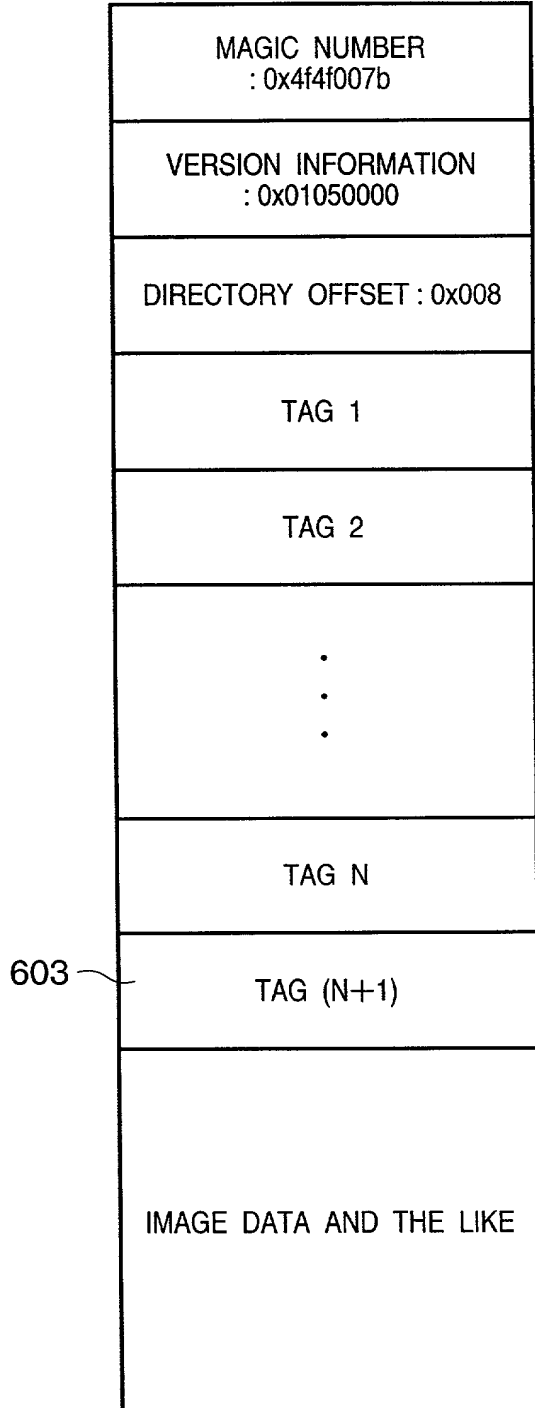
FIG. 15A**FIG. 15B**

FIG. 16

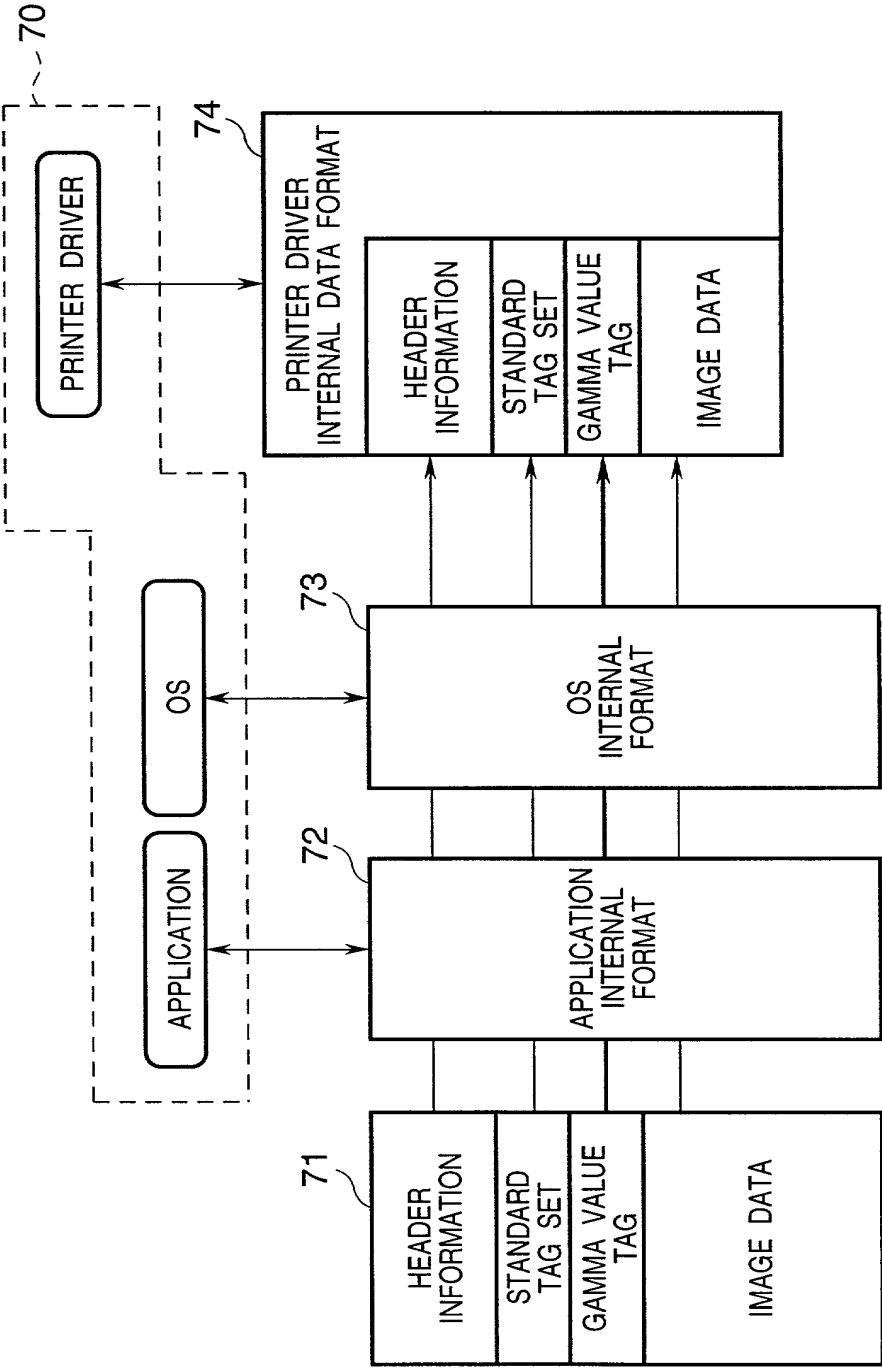


FIG. 17A

W27

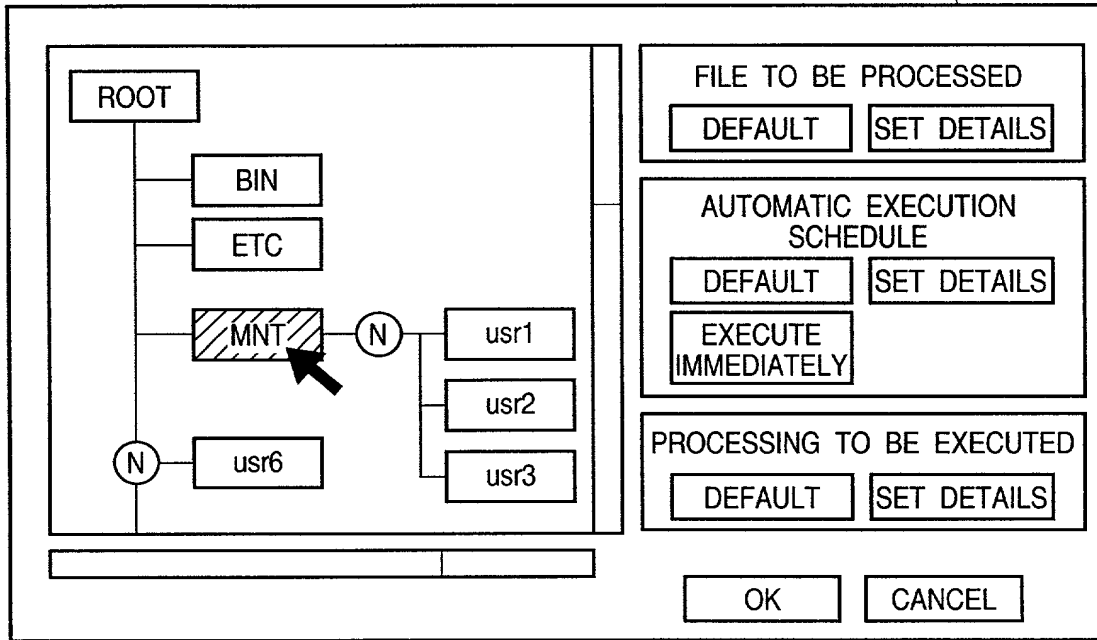


FIG. 17B

W28

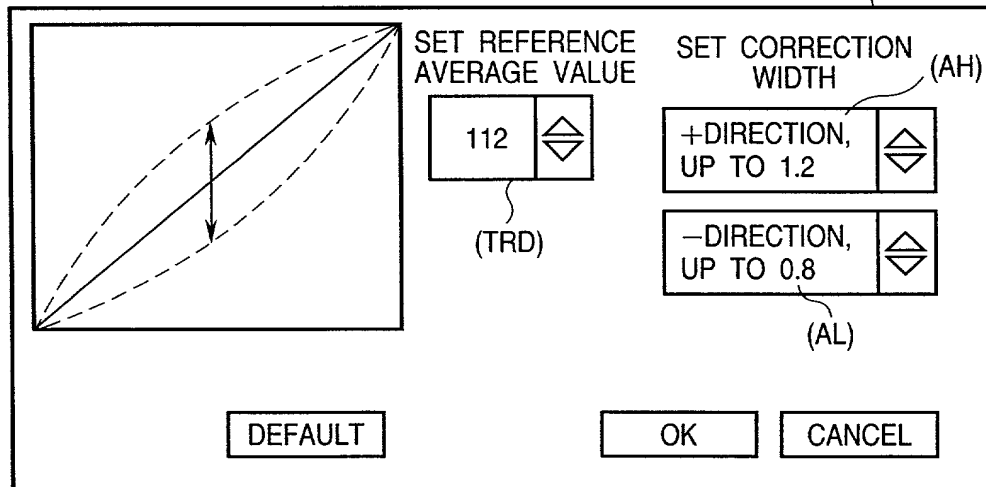


FIG. 18A

W31

PRINTER COLOR ADJUSTMENT		
<input type="radio"/>	AUTO COLOR MANAGER	
<input checked="" type="radio"/>	MANUAL SETUP	<div>SET DETAILS</div> <div>DEFAULT</div>

FIG. 18B

W32

PRINTER COLOR ADJUSTMENT - MANUAL SETUP		
<input type="radio"/>	USE GAMMA CORRECTION TAG (AS IN AUTOMATIC SETTING)	
<input type="radio"/>	NON-USE GAMMA CORRECTION TAG (NEGLECT)	
<input checked="" type="radio"/>	USE SETTING IN PRINTING	<div>SET</div> <div>DEFAULT</div>

FIG. 18C

W33

	SET REFERENCE AVERAGE VALUE	SET CORRECTION WIDTH
	98	+DIRECTION, UP TO 1.4
	CORRECTION INTENSITY	-DIRECTION, UP TO 0.78
	50%	
<div>DEFAULT</div>		<div>OK</div> <div>CANCEL</div>

(TRD)

(AH)

(AL)

(WGT)

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**
(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled _____

IMAGE PROCESSING APPARATUS AND METHOD,
AND RECORDING MEDIUM

the specification of which ☒ is attached hereto ☐ was filed on _____ as United States Application No. or PCT International Application No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
Japan	10-308948	October 29, 1998	Yes
Japan	10-308949	October 29, 1998	Yes

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or §365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application No.	Filed (Day/Mo./Yr.)	Status (Patented, Pending, Abandoned)
-----------------	---------------------	--

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor NAOYUKI NISHIKAWA

Inventor's signature _____

Date _____ Citizen/Subject of JAPAN

Residence 3-24-102, Kamikodanaka 7-chome, Nakahara-ku
Kawasaki-shi, Kanagawa-ken, Japan

Post Office Address c/o Canon Kabushiki Kaisha,
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan